



Chromebox Commercial

Powerful, Commercial Grade Chrome OS Device

The first commercial grade Chrome OS device, designed for the signage, POS and kiosk markets, allows fast and secure delivery of apps.

The AOPEN Chromebox Commercial is a highly reliable and powerful device that operates 24/7 under tough conditions (up to 60°C/140°F*). It sets itself apart from any Chromebox, being a commercial grade device, allowing speedy and secure signage from the cloud using Google Chrome OS.


Deployment and management of the devices have never been easier using Chrome Device Management. Use the signage app of your preference available via the Chrome Web Store to control what's on the screen.

The tough design including the industrial components makes this one of the strongest Chromebox devices available on the market today.

The advantages of the Chromebox Commercial:

- Tough and tamperproof design for 24/7 operability in public spaces.
- Small form factor for easy installment behind displays or integration in kiosks, comes with L-shaped mount.
- The solid-state and fanless design ensure a first-rate performance in challenging situations.
- AC Power Auto Recovery (APAR).
- Included dual band antenna offers a wide reach.
- Options for kiosk and POS device extensions via commercial ports.
- Optional Chrome Device Management on request to save valuable time and thus costs on installation, programming and maintenance.



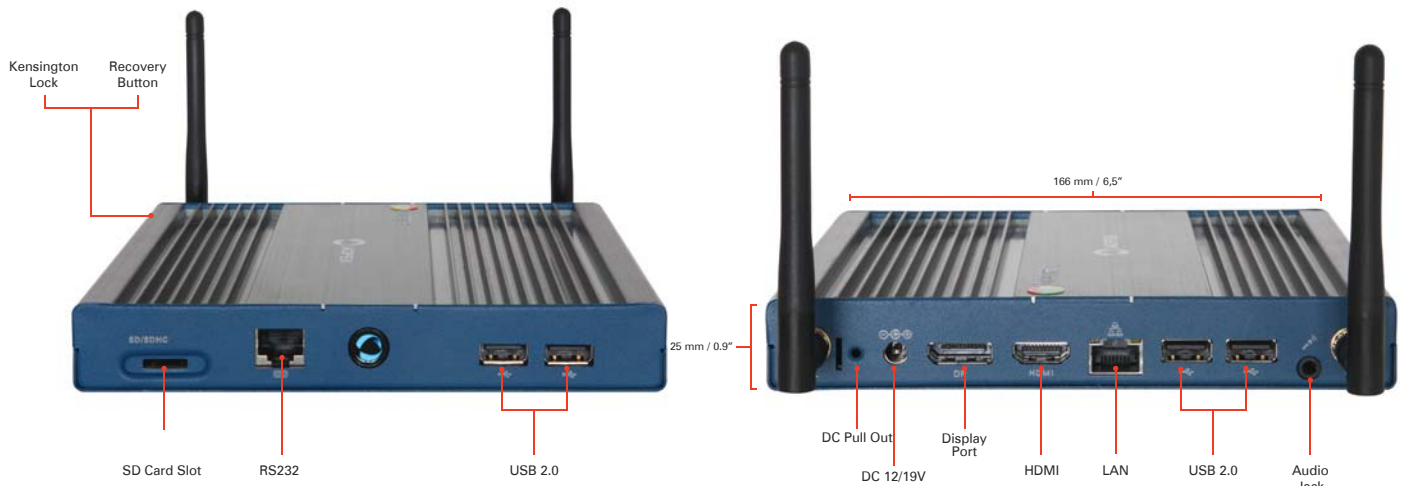

Chromebox Commercial

Specifications		USB 2.0	x 2
Features	Powerful commercial grade Chrome based device.	RJ50 - RS232	x 1
Commercial Features	RJ 50 Ports, Operating Shock 8G, Operating Temperature up to 60°C/140°F*	mSD Card Slot	x 1
Operating System	Chrome OS	Power Button with LED	x 1
CPU	Intel® N2930, 1.83 GHz turbo to 2.16 GHz Quad Core	GbE LAN RJ45	x 1
Graphics	Intel® HD graphics, integrated on CPU	HDMI (1.4a)	x 1
Memory	Dual Channel 4GB/1333 MHz	Display Port	x 1
On Board Slot	M.2 2230-E for WiFi + Bluetooth	USB 2.0	x 2 with BC 1.2
Storage	32 GB	Antenna	x 2
Wireless Data Network	802.11ac, dual-band, 2 x 2 WiFi + Bluetooth 4.0	Audio Jack	x 1
WiFi Security Standard	PCI, CISP, FIPS12, FISMA	DC in 19V/12V connector with 65W power adaptor	
LAN	Realtek RTL8111H	Kensington Lock	x 1
Audio	Maxim MAX98090	Recovery Button	x 1
Form Factor	Dimensions (WxDxH)	166 x 158 x 25 mm 6,5 x 6,2 x 0.9 inch	
	Weight	1450 g (with box and packing material) NT 802 g (Chromebox Commercial+antenna)	
	Color	Metallic Grey & Blue	
Accessories		Quick Start Guide	
Optional Accessories		Warranty and Support Card	
Warranty		Mounting Rails	
		Power Cord/ Power Cord Clip	
		POS peripheral connectors: - RJ50 - RJ12 cable - RJ50 - RS232 Chrome Keyboard & mouse Mounting solutions	
		The Chromebox Commercial comes with a 3 year warranty.	

For more information, contact AOPEN at: chrome@aopen.com

Authorized Australian & NZ Distributor: Goodson Imports Pty Ltd, Representation in all main States and New Zealand, Head Office: 9 Liberty Road, Huntingwood NSW 2148, Sydney Australia
Ph: 02-8875 4544 Fax 02-8875 4588, www.goodson.com.au

AOPEN reserves the right to change specifications of the products without prior notification. For most up to date information, please consult your local AOPEN Sales Representative.

Product images displayed are representative of use and for illustration purposes only. Ability to display content has many contributing factors including the software used. Trademarks are copyright of their respective owners. Other names may be claimed as the property of others. Copyright © AOPEN Inc 2015. © 2015 Google Inc, used with permission. Google Chrome OS™ and Chromebox™ are registered trademarks of Google Inc.

www.aopen.com/chrome
- 201508/Chromebox

*Temperatures over 40°C/104°F require direct power 19 VDC or high heat range adapter (optional)