




AOPEN

an Acer Group Company

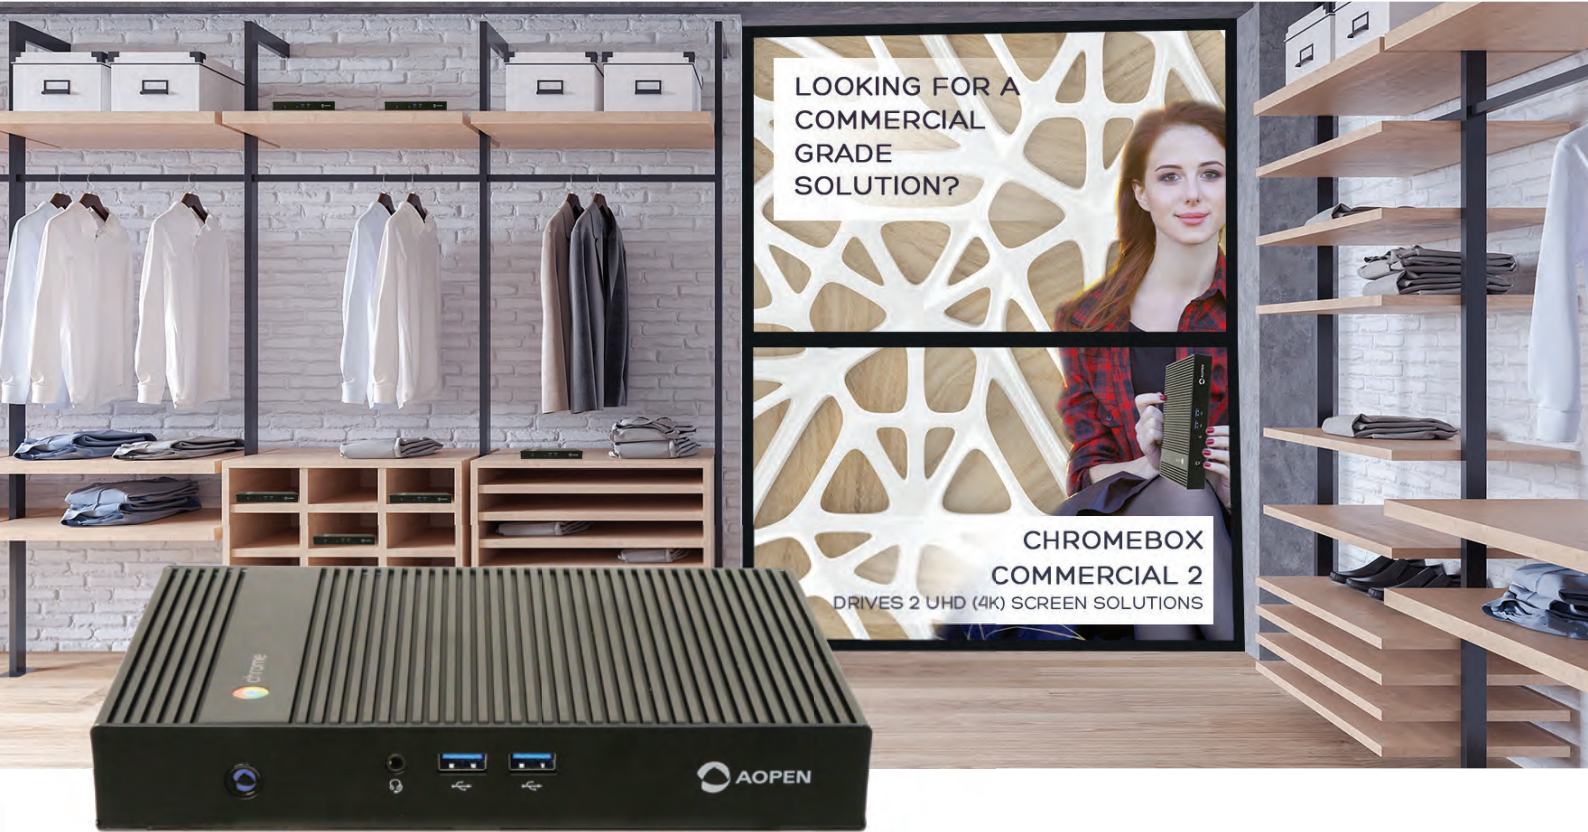

Chromebox Commercial 2

Powerful, Commercial Grade Chrome OS Device, that drives up to two UHD (4k) screens

This Commercial Grade Chrome OS device is specifically designed for digital signage and kiosk applications.


The AOPEN Chromebox Commercial 2 is a highly reliable and powerful device that operates 24/7 under tough conditions (up to 40°C). It sets itself apart from any Chromebox, being the only commercial grade Chromebox. The Chromebox Commercial 2 is fanless and has the capability to run one UHD (4k) screen @60Hz, or two UHD (4k) screens @30Hz.

Chrome Device management

Deployment and management of the devices have never been easier using Chrome Device Management. Use the signage app of your preference available via the Chrome Web Store to control what's on the screen.

The advantages of the Chromebox Commercial 2:

- Runs 1 UHD (4k) display @60Hz or two UHD (4k) displays @30Hz
- 24/7 Operability in public spaces
- Small form factor for easy installment behind displays or integration in kiosks, comes with L-shaped mount
- The solid-state and fanless design ensure a first-rate performance in challenging or moving situations.
- AC Power Auto Recovery (APAR).
- Included dual band antenna offers a wide reach.
- The Chromebox Commercial 2 comes with a 3 year warranty. Extended warranty optional for 5 years.
- Options for kiosk and POS device extensions via commercial ports.
- Optional Chrome Device Management on request to save valuable time and thus costs on installation, programming and maintenance.

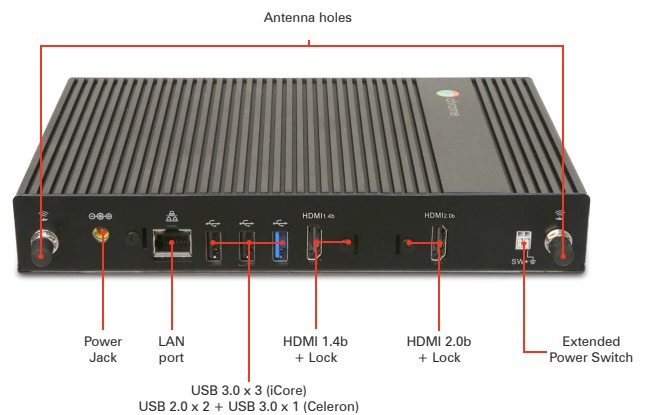

Chromebox Commercial 2

Specifications

Feature First Commercial Grade and Fanless Chromebox to power 4K screens.

Operating System Chrome OS

Housing Material Aluminum / SECC

Chassis Colour Black

Dimensions

W x H x D (mm)	213 x 147 x 32 mm
W x H x D (inch)	8.39 x 5.79 x 1.26 inch

Weight 1.7 kg / 3.75 lb

CPU/Chip set Type Intel® Celeron 3965U / Intel® Core i3-8130

Memory DDR4 4G

Graphics Chip Intel® HD Graphics Integrated on CPU

Expansion slot M.2 Intel® 7265

Audio

Type	3.5mm Audio Jack x 1(combo)
Channel	5.1

LAN GbE LAN

Storage SSD 32G

Front Panel I/O

USB 2.0 Port	-
USB 3.0 Port	x 2
Others	Audio Jack (Combo)

Rear Panel I/O

DC Jack	x 1
HDMI Port	x 2 (+Lock) 1.4b and 2.0b
USB 2.0 Port	x 2 (Celeron SKU) - (Core i SKU)
USB 3.0 Port	x 1 (Celeron SKU) x 3 (Core i SKU)
eSATA Port	-
RJ45 LAN Jack	x 1
Audio Set	Line-out - Line-in -
Antenna Holes	x 2 (Dual band antenna)
Kensington Lock	x 1
Others	x 1 Extended Power Switch

Watchdog Timer

-

Adapter 19V/65W AC adapter (Celeron sku)
19V/90W AC adapter (Core i3 sku)

Input Voltage AC 100 ~240 V

Environment

MTBF	50,000 hrs
Operating temperature	0 ~40 °C
Storage temperature	-30 ~60 °C
Relative Humidity	-90% RH