

SRP-380

3 inch POS printer



Retail



Hospitality




Ticketing




Kiosk

Ultra Reliable and Fast

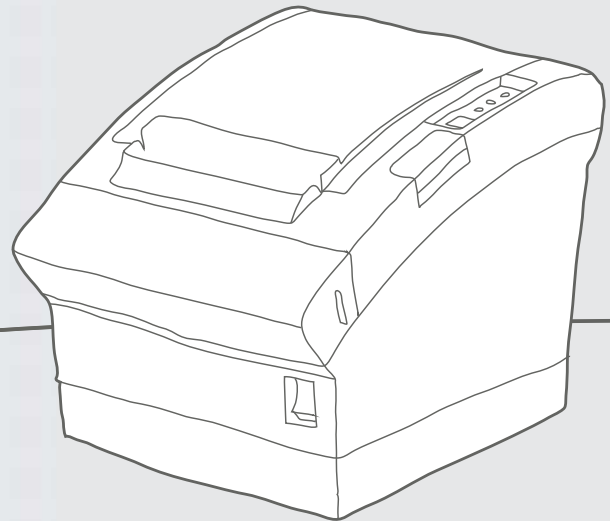

350 mm/sec

TPH
250km

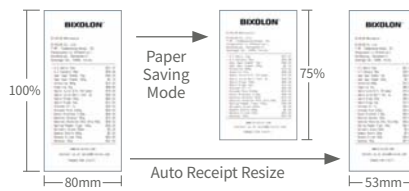

Easy Tracking™



Ensuring Business Continuity

- High reliability of 250km TPH with its auto cutter guaranteed up to 3 million cuts
- Fast speed printing up to 350 mm/sec, 17% faster than other comparable models
- USB V2.0 + Serial, Ethernet, Powered USB, Bluetooth or WLAN

Cost-efficiency

- Various software and firmware settings for paper saving functions
- Paper saving mode, reducing the length of a receipt up to 25%
- Auto receipt resize, 80 - 58mm auto paper reduction function
- Anywhere Anyfont™ (Unicode) removes the need to write multiple code pages for every language
- Compatible with all major operating systems including Android™, iOS™ and Windows® (Apple® MFi certified model)

Low Maintenance

- Life time indicator enables to check TPH and Auto cutter's life with self-test printing via statistic data
- Easy Tracking™ supports a QR code linking to the technical support micro site on a unique label plate found on the bottom of the printer.

BIXOLON®
a Better Solution for your Business™

SRP-380

3 inch POS printer

Specifications

Print Characteristics

Print Method

Direct Thermal

Print Speed

Up to 350 mm/sec

Print Resolution

SRP-380: 180 dpi

SRP-382: 203 dpi

Print Width

Up to 72 mm

Sensor

Paper End, Paper Near End, Cover Open

Media Characteristics

Media Type

Receipt

Media Width

80 / 58 mm

Media Roll Diameter

Up to 83 mm

Media Thickness

0.062 ~ 0.075 mm

Supply Method

Easy Paper Loading

Physical Characteristics

Dimensions (WxLxD)

147 x 200 x 148 mm

(5.79 x 7.87 x 5.82 inch)

Weight

1.56 kg(3.43 lbs.)

Power

EnergyStar Certified,

External Power Adaptor 100-240V AV, 50/60Hz

Drawer Port

2 ports (Via y-type adaptor)

Performance Characteristics

NV Image Memory

768 Kbytes (Mono)

Receive Buffer

4 Kbytes

User Define Buffer

12 Kbytes

Interface

Standard: USB V2.0 FS

Optional: USB V2.0 FS + Ethernet / Serial /
Dual Serial / WLAN¹ / Bluetooth² /
Powered USB

* WLAN: 802.11a/b/g/n(2.4G + 5G)

**Bluetooth: Class 1, MFi certified

Environment Characteristics

Temperature

Operating: 0 ~ 40°C (32 ~ 104°F)

Storage: -20 ~ 60°C (-4 ~ 140°F)

Humidity

Operating: 10 ~ 80% RH

Storage: 10 ~ 90% RH

Reliability

Thermal Print Head (TPH)

250 km ***

Auto Cutter

3 Million Cuts ***

***** Specified Paper**

- TF50KS-E (Paper thickness: 65µm)

: Nippon Paper industries Co., Ltd.

- PD 150R (Paper thickness: 75µm)

: New Oji Paper Mfg, Co., Ltd

- PD 160R (Paper thickness: 75µm)

: New Oji Paper Mfg, Co., Ltd.

- P350 (Paper thickness: 62µm)

: Kansaki Specialty Paper, Inc. (USA)

Software

Emulation

BXL / POS

Driver / Utility

Windows Driver, OPOS Driver, JPOS Driver,

Linux / Mac CUPS Driver,

Virtual COM USB/Ethernet Driver,

Utility Program, Web Driver

SDK/Plugin

iOS SDK, Android SDK, Windows SDK,

Windows Runtime SDK, Linux SDK,

Xamarin SDK, Cordova Plugin, Chrome SDK

Fonts / Graphics / Symbologies

Character Size

Font A: 12 x 24 Font B: 9 x 17 Font C: 9 x 24

KOR, CHN, JPN: 24 x 24

Characters Per Line

SRP-380: Font A: 42 Font B, C: 56

KOR, CHN, JPN: 21

SRP-382: Font A: 48 Font B, C: 64

KOR, CHN, JPN: 24

Character Sets

Alphanumeric: 95

Extended Graphics: 128 x 35 page

International: 32

Unicode: UTF-8, UTF-16, UTF-32

Graphics

Supporting user-defined fonts, graphics,

formats, and logos

Barcode Symbologies

1D: Coda Bar, Code 39, Code 93, Code 128,

EAN-8, EAN-13, ITF, UPC-A, UPC-E

2D: Data Matrix, GS1-128, GS1 DataBar Stacked/

Omnidirectional / Truncated / Limited /

Expanded, PDF417, QR code

Accessories

Standard

2 inch Partition (58 mm)

Optional

External buzzer, B-Melodist, USB A-B Cable 1.8m,

Powered USB 0.5m, Powered USB 1.2m



BR-SRP-380-EN-JAN19-V2

Copyright © BIXOLON Co., Ltd. All rights reserved. Features and specifications are subject to change without prior notice.

BIXOLON®

BIXOLON Co., Ltd.

+82 (0) 31 218 5500

sales@bixolon.com

BIXOLON America Inc.

+1 858 764 4580

sales@bixolonusa.com

BIXOLON Europe GmbH

+49 211 68 78 54 0

sales@bixolon.de

www.Bixolon.com

Authorised Distributor: Goodson Imports Pty Ltd, Representation in all main States and New Zealand,
Head Office: 9 Liberty Road, Huntingwood NSW 2148, Sydney Australia Ph: 02-8875 4544 Fax 02-8875 4588, www.goodson.com.au

