


# DE67-HA(I)

## Stunning Performance

With the growing demand for dynamic interactive apps such as video conferencing, social media, interactive menuboard, kiosks, HD movies and many more powerful, content heavy applications, the DE67-HA(I) allows you to stay ahead of the curve. Aimed at those with the most demanding multimedia and computational workloads, the DE67-HA(I) provides stunning performance and razor sharp graphics to intensify the computing experience.

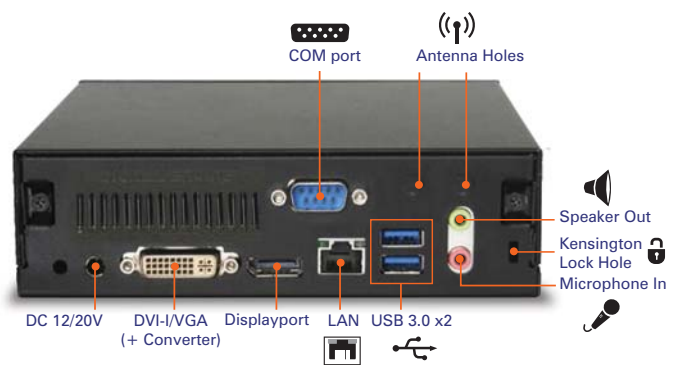

| Model name       |                | <b>DE67-HA(I)</b>   |
|------------------|----------------|---|
| Feature          |                | DE67-HA: Supports Intel® AMT 7.0<br>DE67-HAI: Supports Intel® AMT 8.0   |
| Housing Material |                | SECC t=0.8 mm   |
| Dimension        | W x H x D (mm) | 166 x 48 x 157 mm   |
| Weight(Kg/Pound) |                | 1.03 kg/2.27 pound (N.W.)   |
| CPU              | Socket         | RPGA988B  |
|                  | Type           | DE67-HA: Supports 2nd generation Intel® Core™ i3, i5, i7 mobile processor TDP≤35W&45W<br>DE67-HAI: Supports above and 3rd generation Intel® Core™ i3, i5, i7 mobile processor TDP≤35W |
| Chipset          |                | Intel® QM67 Chipset   |
| Memory           | Channels       | Dual Channel  |
|                  | Type           | DDRIII SO-DIMM x 2  |
|                  | DDR            | 1066/1333   |
|                  | Max Memory     | 16G (depending on OS)   |
| Graphics         | Chip           | HD3000/4000   |
| Audio            | Type           | Realtek HD Audio Codec ALC662   |
|                  | Channels       | Stereo/5.1 CH with HDMI   |
| LAN              |                | 10/100/1000Mbps WOL/PXE   |

| Storage                 |                   | 2.5" SATA III HDD x1<br>Slim ODD x1<br>mSATA x1          |
|-------------------------|-------------------|--|
| Expansion               | Mini Card Slot    | Full size x 1, half size x 1                             |
| CPU Thermal             | Noise (idle mode) | 27dB   |
| WatchDog Timer          |                   | 1 ~ 255 SEC./min   |
| Adapter                 |                   | 90W (20V, 4.5A) AC Adapter                               |
| Input Voltage           |                   | AC 100 ~ 240V/DC 12V/20V                                 |
| <b>Environment</b>      |                   |  |
| MTBF                    |                   | 40,000hrs  |
| Operating Temperature   |                   | 0 ~ 50°C (32 ~ 122°F)                                    |
| Storage Temperature     |                   | -30 ~ 60°C (-22 ~ 140°F)                                 |
| Relative Humidity       |                   | 95% RH (50°C non-Condensing)                             |
| Operating Vibration     |                   | 0.5Gms, Random, 10 ~ 500Hz,X,Y,Z<br>3Axes,<br>0.5hr/Axis |
| Non-Operating Vibration |                   | 2Gms, Random, 10 ~ 300Hz,X,Y,Z<br>3Axes,<br>1hr/Axis     |
| Operating Shock         |                   | 8G, Half sine, 11ms duration                             |
| Non-Operating Shock     |                   | 50G, Half sine, 11ms duration                            |

Supports:



\*Android only available for DE67-HAI on OpenSign platform

Australian Distributor: Goodson Imports Pty Ltd, Offices in all main States and New Zealand,  
Ph: 02-8875 4544 Fax 02-8875 4588 [www.goodson.com.au](http://www.goodson.com.au)

