


DSD65-HE2

The DSD65-HE2 is an ultra-bright 65" inch display with slim bezel. This display is the perfect solution for a brand that wants to make a statement with their interior design and in-store communication.

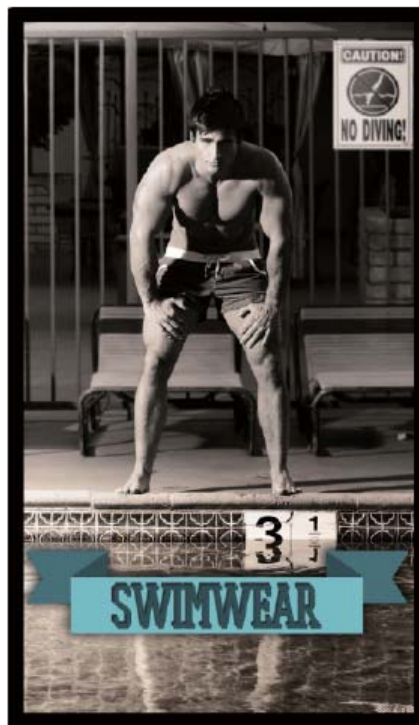

The 65" ultra-bright display

Display Orientation	Portrait / Landscape
Green Compliance	RoHS : Yes
Internal Speaker	Option
IR remote control	Yes
Keypad	Yes
Life time	50,000 Hrs
Operating Temperature	0~40°C
Operating Humidity	10~80% RH max
OSD display	Yes
Power Consumption	C-tick
Storage Temperature	-20° to 60°
Storage Humidity	10~80%RH max
Tempered Glass	Option

Connectivity

HDMI : in x1, VGA : in x1
DVI : in x1, YPbPr : in x1
CVBS : in x1, RS232 : in x1/out x1
Audio : in x2/out x1
External Speaker line out: R/L 8Wx2
Internal Speaker : R/L 5Wx2

Mechanical Spec.

VESA Mount: 500x400/400x400
Screw Insertion of VESA mount(Max.) : 8.2mm
Color:Black
Weight((Net/Gross): 47.5Kg / 56.5Kg
Set Dimension (LxHxD):1512x 882x 58 mm
Package Dimension (LxHxD):1670x 1056x 298 mm
Bezel width : L/R 36 mm T/B 34mm
AC inlet/outlet :Input x1/ Output x1

Package Contents

AC power cable : Yes
Remote controller : Yes
Battery : CR2025
VESA Mount screw x4 pcs: M8

Panel

Diagonal size : 65 inch
Type : AMVA
Resolution : 1920x1080
Pixels Pitch (H x W) : 0.744x0.744
Brightness (typ.) : **700 nits**
Contrast Ratio : 4000:1
Viewing Angel (H/W) : 178/178
Response Time (G-to-G) : 8 ms
Color/gray scale : 1073M/10bits
Aspect ratio : 16:9
Frequency : 60Hz
Surface Treatment :AG,3H

Power

Power Consumption (Max.) : 250 W
Power Consumption at Stand-by(Max.) : 1.5 W
Power Input : AC 100~240V AC 50/60Hz

Special features

Fanless
Thermal Alarm & Protection
RS232 remote control

- Fanless
- RS232 remote control
- Thermal Alarm & Protection

Authorised Australian Distributor:
Goodson Imports Pty Ltd
142 Wicks Road
Macquarie Park NSW 2113
Offices in all main States
Ph: 02-8875 4544 Fax 02-8875 4588
www.goodson.com.au

