

CHERRY MX1A-GxxA/B



Models may vary from the image shown

High-precision MX keyswitch specially engineered for RGB Multicolor Illumination

Brown switch: Soft pressure point, key stroke with soft tactile contact feedback.

A shining example: The new CHERRY MX RGB switch. Globally pioneering technology for precision mechanical keyswitches. Optimised for use with SMD LEDs, which make the keyboard shine in all RGB colours with high luminosity. Every key can be illuminated individually in a different color. Engineered and Made in Germany.

Key benefits

- Brown switch: Soft pressure point, key stroke with soft tactile contact feedback
- MX switch variant optimised for use with SMD LEDs (RGB or single colour)
- More consistent lighting throughout the keycap due to optimised, transparent casing and scattering surface including lens.
- Option to use all 16.7 million RGB colours in high luminosity (scope of supply does not include LED)
- SMD LEDs directly mounted on the circuit board for cost-efficient, fully automated production
- High-precision mechanical keyswitch based on the MX standard
- World exclusive CHERRY Gold Crosspoint technology
- Short bounce time for high switching frequency (such as for fast typing)
- Self-cleaning contacts, resistant to dust and dirt
- Over 50 million keystrokes / contact switches per module

- with no loss of quality
- Engineered and Made in Germany.


Technical Data:

Housing colour:

Transparent cover, plain base

Keymodule:

- Switch type: MX
- Protection class: IP40
- Operation characteristics: BROWN SWITCH Pressure point (55cN)

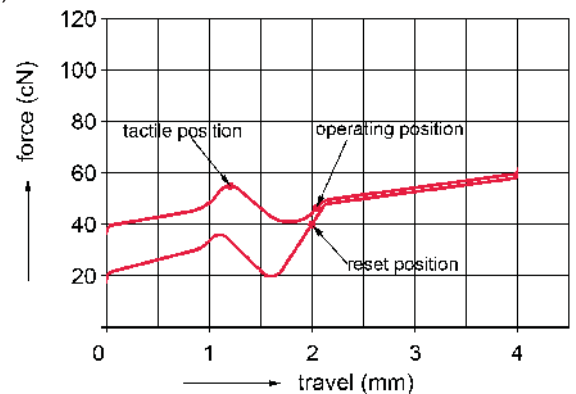

- Fastening: Product dependant, see table "Models"
- Switching voltage: 12 V AC/DC max.
- Switching current: 10 mA AC/DC max.
- Dielectric strength: 500 V / 50Hz
- Durability: > 50 million actuations
- Contact configuration: Single-pole contact
- Actuator travel: 4.0 -0.4 mm
- Pretravel: 2 ± 0.6 mm
- Initial force: 30 cN min.
- Actuation force: 45 ± 20 cN
- Pressure point force: 55 ± 25 cN
- Bounce time: < 5 ms (during actuation with 0,4 m/s)
- Standard lead spacing: 19.05 mm (16 mm min.)
- Lighting: SMD LED can be mounted directly on the circuit board (not included in the module), opening for SMD LED in the base.
- Decoupling diode: no
- Wire jumper: no
- Insulation materials: Thermoplastics (min.UL 94 HB)
- Spring: Stainless steel
- Contacts: High-quality gold alloy
- Storage Temperature: 5°C to 40°C
- Operating Temperature: -40°C to 70°C
- Humidity: Storage: average <50% max. 3 months / 75% max. 15 days, operation: 5% to 95% without condensation

For detailed information and the layout of the details described above, please do not hesitate to ask for our technical specifications and drawing.

Warranty:

2 years

Errors, technical changes and delivery possibilities excepted.
Technical information refers only to the specifications of the
products. Features may differ from the information provided.

Authorised Australian & New Zealand Distributor:
Goodson Imports Pty Ltd
9 Liberty Road
Huntingwood NSW 2148
Representation in all main States and New Zealand
Ph: 02-8875 4544 Fax 02-8875 4588
www.goodson.com.au

Models:

	Product name	Order number	Fastening
1	CHERRY MX RGB Keyswitch	MX1A-G1NA	Snap fastening in frame
2	CHERRY MX RGB Keyswitch	MX1A-G1NB	Fixing pins in the printed circuit board