


DE6140

Power Dynamic Content on Videowalls

The DE6140 takes computing power to a whole new level. This small and powerful system enables multi-display capabilities, for up to four Full HD screens. Whether powering a 2x2 or 4x1 video wall, or powering several screens on different locations, the DE6140 is the ideal machine for multiscreen purposes.

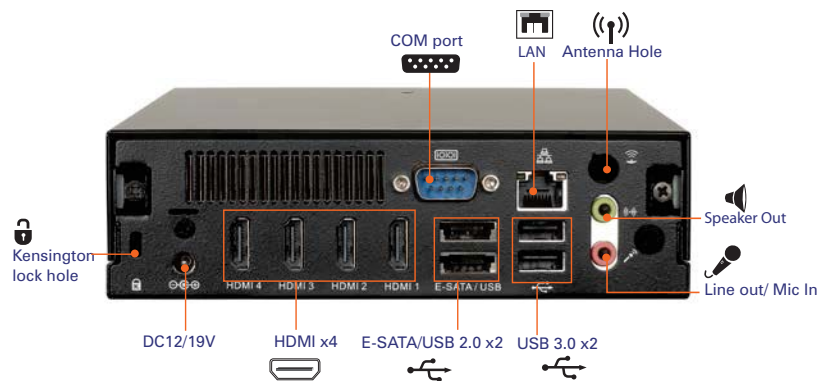

Model name		DE6140
Feature	AMD Eyefinity Technolgy/ supports 3 independent displays	
Housing Material	SECC t=0.8mm	
Dimension	W x H x D (mm)	166 x 48 x 157 mm
Weight (Kg/Pound)	1.12 kgs / 2.46 lbs(N.W.)	
CPU	Socket	Socket FS1r2
	Type	Supports AMD Embedded R-series APU Quad core mobile processor TDP≤35W
Chipset	FCH: AMD A70M chipset	
Memory	Channels	Dual Channel
	Type	DDRIII SO-DIMM x 2
	Speed Grade	1333/1600Mbps
	Max Memory	16GB (depending on OS)
Graphics	Chip	AMD Radeon HD 7660G (build in APU R-464L) *GPU depends on CPU
Expansion	Mini Card Slot	Full size x1 (support mSATA)
Audio	Type	Realtek HD Audio Codec ALC662
	Channel	Stereo

LAN	10/100/1000Mbps	
Storage	2.5" SATA III HDD x1 mSATA x1	
CPU Thermal	Noise (idle mode)	27dB
WatchDog Timer	1 ~ 255 SEC./ min	
Adapter	90W (19V, 4.74A) AC Adapter	
Input Voltage	AC 100 ~ 240V/DC 12/19V	
Environment		
MTBF	40,000hrs	
Operating Temperature	0 ~50°C (32 ~ 122°F)	
Storage Temperature	-30 ~ 60°C (-22 ~ 140°F)	
Relative Humidity	95% RH (50°C non-Condensing)	
Operating Vibration	0.5Gms,Random,10~500Hz,X,Y,Z 3 Axes,0.5hr/Axis	
Non-Operating Vibration	2Gms,Random,10~300Hz,X,Y,Z 3 Axes,1hr/Axis	
Operating Shock	8G,Half sine,11 ms duration	
Non-Operating Shock	50G,Half sine,11 ms duration	

Supports:



Australian Distributor: Goodson Imports Pty Ltd, Offices in all main States and New Zealand,
Ph: 02-8875 4544 Fax 02-8875 4588, www.goodson.com.au

